



VPT100+2800D Series



HIGH RELIABILITY COTS DC-DC CONVERTERS

DESCRIPTION

The VPT100 series of isolated COTS DC-DC converters is a cost effective solution for many demanding high reliability applications. A wide input voltage range accommodates nominal 28V inputs including avionics, mobile, ground systems, and other applications. A high efficiency design reduces input power requirements and eases thermal management. Low input and output ripple, fixed operating frequency, and companion EMI filters simplify system design and compliance. A proven design heritage, no optoisolators and a rugged all-metal package ensure long term reliability.

The VPT100 series is intended for harsh environments including severe vibration, shock and temperature cycling. Testing is to JESD22, MIL-STD-810, and MIL-STD-883.

These converters are designed and manufactured in the USA in a facility certified to ISO9001, J-STD-001 and IPC-A-610.

This product may incorporate one or more of the following U.S. patents:

5,784,266
5,790,389
5,963,438
5,999,433
6,005,780
6,084,792
6,118,673

FEATURES

- High Reliability at Low Cost
- Up to 100 Watts Maximum Output Power
- High Efficiency, Up to 89%
- Wide Input Voltage Range: 16 to 40 Volts per MIL-STD-704 and MIL-STD-1275
- High Input Transient Voltage: 50 Volts for 1 sec
- Input Undervoltage Lockout
- Fixed Frequency
- Output Voltage Trim (+10% / -20%)
- Output Soft Start
- Current Limit Protection
- Short Circuit Protection
- Magnetic Feedback, no Optoisolators
- Wide Temperature Range, -55°C to 100°C
- Internally Conformal Coated
- Six Sided Non-Hermetic Rugged Metal Enclosure
- Meets MIL-STD-461C/D/E Conducted Emissions Requirements When Used With a VPTF series EMI Filter



Figure 1 – VPT100+2800D Converter
(Not To Scale)



VPT100+2800D Series

SPECIFICATIONS ($T_{CASE} = -55^{\circ}\text{C}$ to $+100^{\circ}\text{C}$, $V_{IN} = +28\text{V} \pm 5\%$, Full Load, Unless Otherwise Specified)

ABSOLUTE MAXIMUM RATINGS

| | | | |
|---|-------------|--------------------------------------|-----------------|
| Input Voltage (Continuous) | 40 V_{DC} | Junction Temperature Rise to Case | +17°C |
| Input Voltage (Transient, 1 second) | 50 Volts | Storage Temperature | -55°C to +125°C |
| Output Power | 100 Watts | Lead Solder Temperature (10 seconds) | 300°C |
| Power Dissipation (Full Load, $T_{CASE} = +100^{\circ}\text{C}$) | 17 Watts | Weight (Maximum) | 90 Grams |

| Parameter | Conditions | VPT100+2812D | | | VPT100+2815D | | | Units | |
|---|---|--|------|-------|--------------|------|--------|-------------------|----|
| | | Min | Typ | Max | Min | Typ | Max | | |
| STATIC | | | | | | | | | |
| INPUT Voltage ³ | Continuous | 16 | 28 | 40 | 16 | 28 | 40 | V | |
| | Transient, 1 sec | - | - | 50 | - | - | 50 | V | |
| Current | Inhibited | - | - | 5 | - | - | 5 | mA | |
| | No Load | - | 50 | 100 | - | 50 | 100 | mA | |
| Ripple Current | Full Load ⁴ , 20Hz to 10MHz | - | - | 200 | - | - | 200 | mA_{p-p} | |
| Inhibit Pin Input ³ | | 0 | - | 1.5 | 0 | - | 1.5 | V | |
| Inhibit Pin Open Circuit Voltage ³ | | 9.0 | 12.0 | 14.0 | 9.0 | 12.0 | 14.0 | V | |
| UVLO Turn On | | 14.5 | - | 15.8 | 14.5 | - | 15.8 | V | |
| UVLO Turn Off ³ | | 14.0 | - | 15.0 | 14.0 | - | 15.0 | V | |
| OUTPUT Voltage ⁴ | + V_{OUT} $T_{CASE} = 25^{\circ}\text{C}$ | 11.82 | 12.0 | 12.18 | 14.775 | 15.0 | 15.225 | V | |
| | + V_{OUT} $T_{CASE} = -55^{\circ}\text{C}$ to $+100^{\circ}\text{C}$ | 11.70 | 12.0 | 12.30 | 14.625 | 15.0 | 15.375 | V | |
| | - V_{OUT} $T_{CASE} = 25^{\circ}\text{C}$ | 11.70 | 12.0 | 12.30 | 14.625 | 15.0 | 15.375 | V | |
| | - V_{OUT} $T_{CASE} = -55^{\circ}\text{C}$ to $+100^{\circ}\text{C}$ | 11.58 | 12.0 | 12.42 | 14.475 | 15.0 | 15.525 | V | |
| Power ^{2,5} | Total | - | - | 100 | - | - | 100 | W | |
| | $\pm V_{OUT}$ | - | - | 70 | - | - | 70 | W | |
| Current ^{2,5} | $\pm V_{OUT}$ | - | - | 5.83 | - | - | 4.66 | A | |
| Ripple Voltage | $\pm V_{OUT}$ | - | - | 100 | - | - | 100 | mV_{p-p} | |
| Line Regulation | + V_{OUT} | $V_{IN} = 16\text{V}$ to 40V | - | - | 20 | - | - | 20 | mV |
| | - V_{OUT} | $V_{IN} = 16\text{V}$ to 40V | - | - | 100 | - | - | 100 | mV |
| Load Regulation | + V_{OUT} | No Load to Full Load ⁴ | - | - | 100 | - | - | 100 | mV |
| | - V_{OUT} | No Load to Full Load ⁴ | - | - | 150 | - | - | 150 | mV |
| Cross Regulation | - V_{OUT} | +Load 70%, -Load 30% +Load 30%, -Load 70% | - | - | 450 | - | - | 450 | mV |
| EFFICIENCY | Full Load ⁴ | 86 | 88 | - | 87 | 89 | - | % | |
| LOAD FAULT POWER DISSIPATION | Overload ³ | - | - | 24 | - | - | 24 | W | |
| | Short Circuit | - | - | 24 | - | - | 24 | W | |
| CAPACITIVE LOAD ³ | Either Output | - | - | 500 | - | - | 500 | μF | |
| SWITCHING FREQUENCY | | 300 | - | 380 | 300 | - | 380 | kHz | |
| SYNC FREQUENCY RANGE | $V_H - V_L = 5\text{V}$, DC = 20-80% | 300 | - | 380 | 300 | - | 380 | kHz | |
| ISOLATION | 500 V_{DC} , $T_{CASE} = 25^{\circ}\text{C}$ | 100 | - | - | 100 | - | - | $\text{M}\Omega$ | |
| MTBF (MIL-HDBK-217F) | GM @ $T_C = 55^{\circ}\text{C}$ | - | 344 | - | - | 344 | - | kHrs | |

See notes next page.



VPT100+2800D Series

SPECIFICATIONS ($T_{CASE} = -55^{\circ}\text{C}$ to $+100^{\circ}\text{C}$, $V_{IN} = +28\text{V} \pm 5\%$, Full Load, Unless Otherwise Specified)

ABSOLUTE MAXIMUM RATINGS

| | | | |
|---|-------------|--------------------------------------|-----------------|
| Input Voltage (Continuous) | 40 V_{DC} | Junction Temperature Rise to Case | +17°C |
| Input Voltage (Transient, 1 second) | 50 Volts | Storage Temperature | -55°C to +125°C |
| Output Power | 100 Watts | Lead Solder Temperature (10 seconds) | 300°C |
| Power Dissipation (Full Load, $T_{CASE} = +100^{\circ}\text{C}$) | 17 Watts | Weight (Maximum) | 90 Grams |

| Parameter | Conditions | VPT100+2812D | | | VPT100+2815D | | | Units | |
|---|---------------|---------------------------------------|-----|-----|--------------|-----|-----|-------|------------------|
| | | Min | Typ | Max | Min | Typ | Max | | |
| DYNAMIC | | | | | | | | | |
| Load Step Output Transient | $\pm V_{OUT}$ | Half Load to Full Load | - | - | 600 | - | - | 600 | mV _{PK} |
| Load Step Recovery ¹ | | | - | - | 300 | - | - | 300 | μSec |
| Line Step Output Transient ³ | $\pm V_{OUT}$ | $V_{IN} = 16\text{V}$ to 40V | - | - | 900 | - | - | 1200 | mV _{PK} |
| Line Step Recovery ^{1,3} | | | - | - | 300 | - | - | 300 | μSec |
| Turn On Delay | $\pm V_{OUT}$ | $V_{IN} = 0\text{V}$ to 28V | - | 6 | 10 | - | 6 | 10 | mSec |
| Turn On Overshoot | | | - | 0 | 50 | - | 0 | 50 | mV _{PK} |

- Notes:
1. Time for output voltage to settle within 1% of its nominal value.
 2. Derate linearly to 0 at 110°C.
 3. Verified by qualification testing.
 4. Half load at $+V_{OUT}$ and half load at $-V_{OUT}$.
 5. Up to 70% of the total power or current can be drawn from any one of the two outputs.

BLOCK DIAGRAM

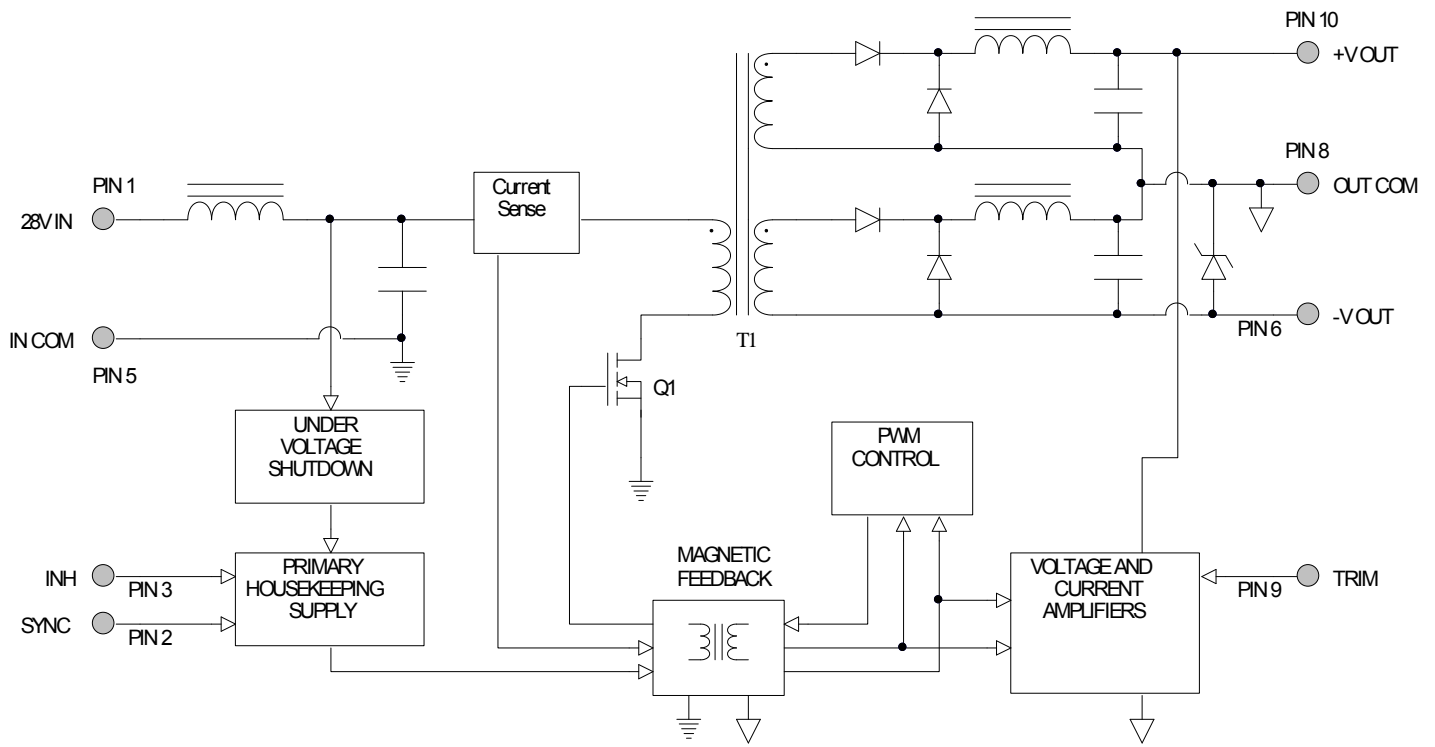


Figure 2

CONNECTION DIAGRAM

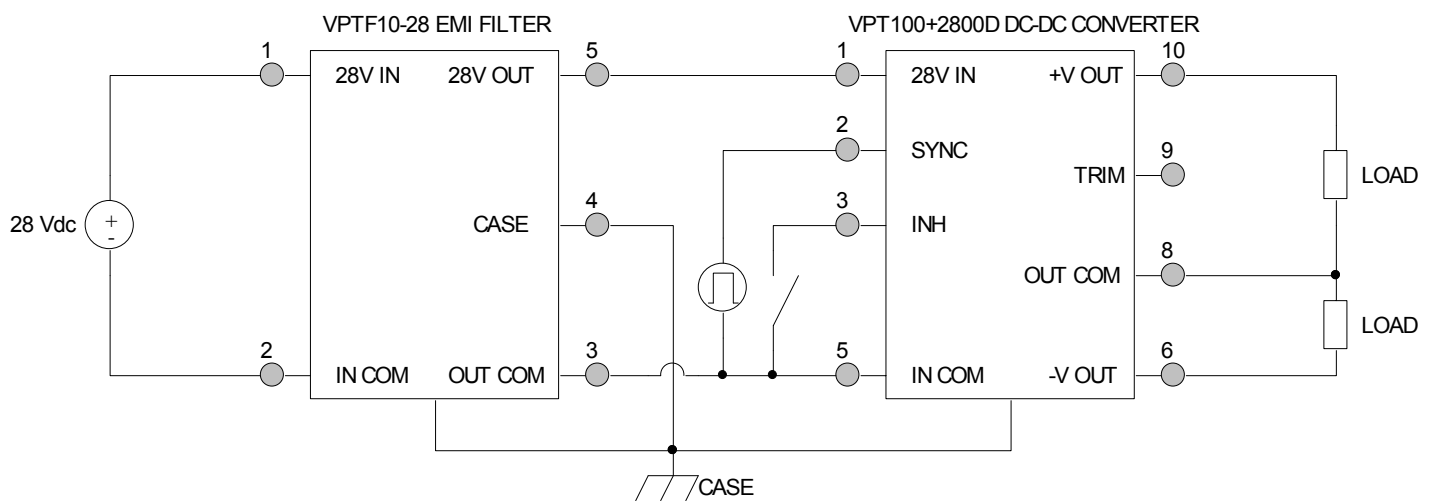


Figure 3

CONNECTION DIAGRAMS

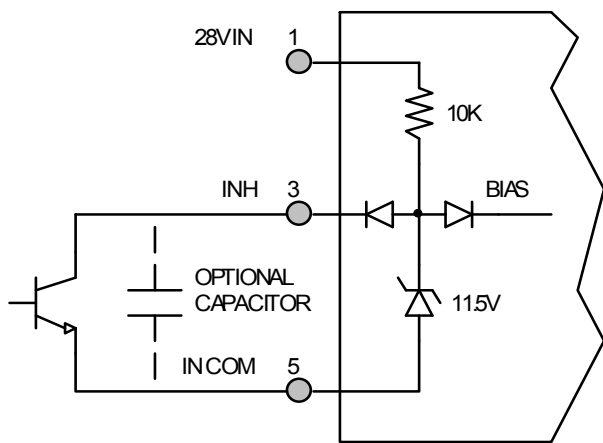


Figure 4 – Inhibit Circuit

(Shown with optional capacitor for turn-on delay)

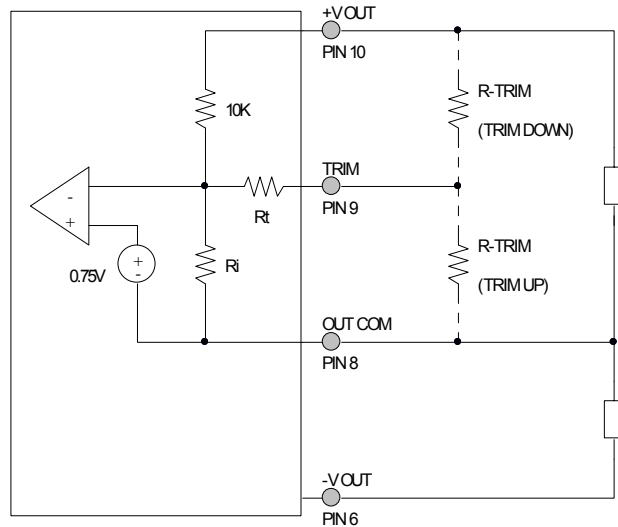


Figure 5 – Output Voltage Trim Circuit

OUTPUT VOLTAGE TRIM

The output voltage can be trimmed down by connecting a resistor between the TRIM pin and the +V OUT pin, or can be trimmed up by connecting a resistor between the TRIM pin and the OUT COM pin as shown in Figure 5. The maximum trim range is +10% up and -20% down. The appropriate resistor values versus the output voltage are given in the trim table below.

| VPT100+2812D | | VPT100+2815D | |
|-------------------|-------------------------|-------------------|-------------------------|
| $\pm V_{OUT}$ (V) | R_{TRIM} (Ω) | $\pm V_{OUT}$ (V) | R_{TRIM} (Ω) |
| 13.2 | 1.14k | 16.50 | 686 |
| 13.0 | 2.39k | 16.25 | 1.69k |
| 12.8 | 4.26k | 16.00 | 3.19k |
| 12.6 | 7.39k | 15.75 | 5.7k |
| 12.4 | 13.6k | 15.50 | 10.7k |
| 12.2 | 32.4k | 15.25 | 25.9k |
| 12.0 | -- | 15.00 | -- |
| 11.8 | 548k | 14.75 | 551k |
| 11.6 | 266k | 14.50 | 270k |
| 11.4 | 172k | 14.25 | 175k |
| 11.2 | 126k | 14.00 | 128k |
| 11.0 | 97.4k | 13.75 | 99.5k |
| 10.8 | 78.6k | 13.50 | 80.6k |
| 10.6 | 65.3k | 13.25 | 67k |
| 10.4 | 55.2k | 13.00 | 56.9k |
| 10.2 | 47.4k | 12.75 | 49k |
| 10.0 | 41.1k | 12.50 | 42.6k |
| 9.8 | 36k | 12.25 | 37.5k |
| 9.6 | 31.8k | 12.00 | 33.2k |

EFFICIENCY PERFORMANCE CURVES ($T_{CASE} = 25^{\circ}C$, Full Load, Unless Otherwise Specified)

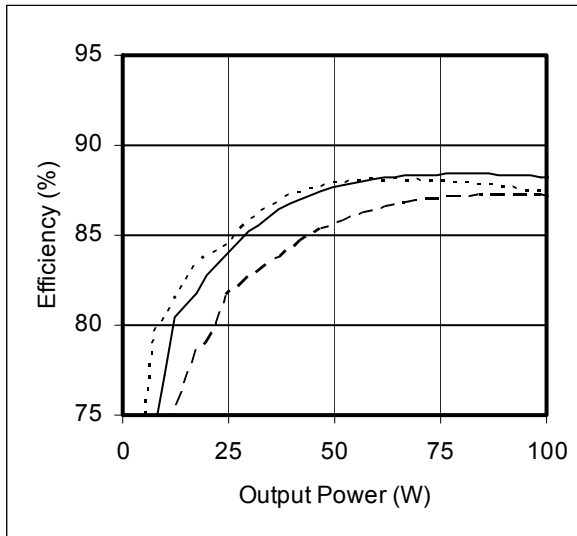



Figure 6 – VPT100+2812D
Efficiency (%) vs. Output Power (W)

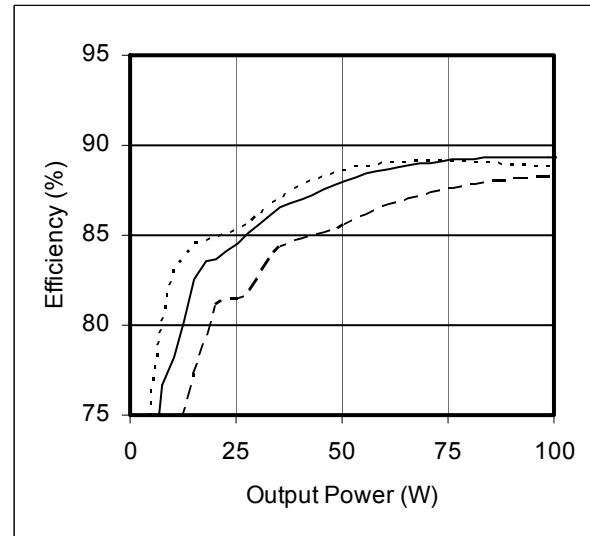


Figure 7 – VPT100+2815D
Efficiency (%) vs. Output Power (W)

EMI PERFORMANCE CURVES

($T_{CASE} = 25^{\circ}C$, $V_{IN} = +28V \pm 5\%$, Full Load, Unless Otherwise Specified)

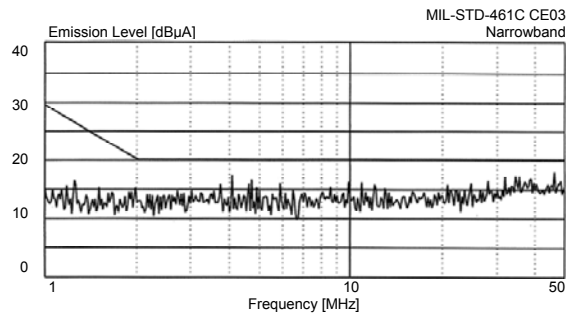
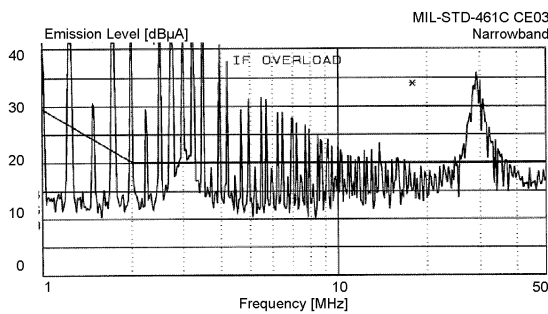
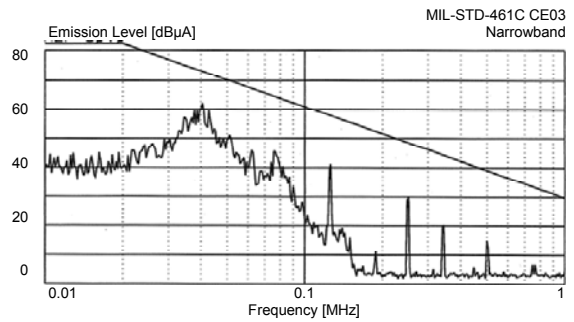
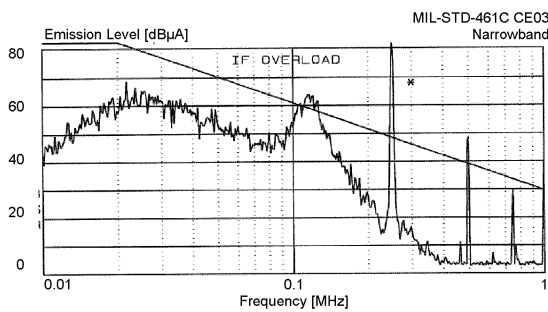


Figure 8 – VPT100+2800D without EMI Filter

Figure 9 – VPT100+2800D with VPTF Series EMI Filter

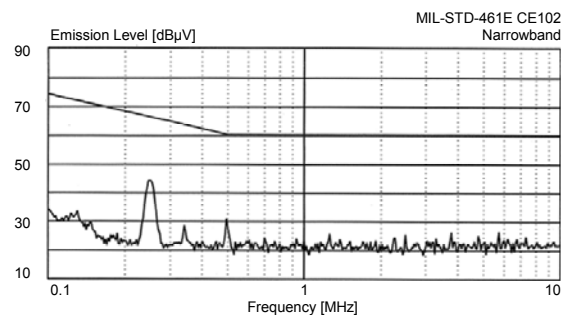
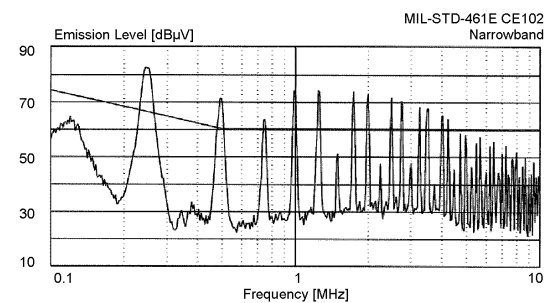
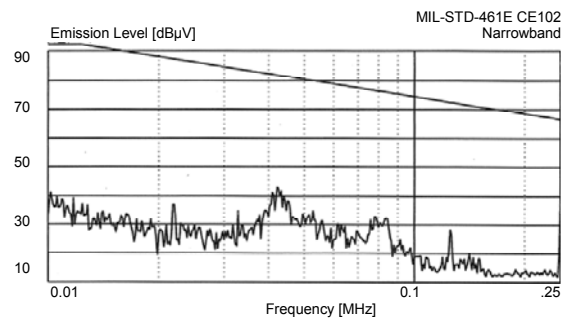
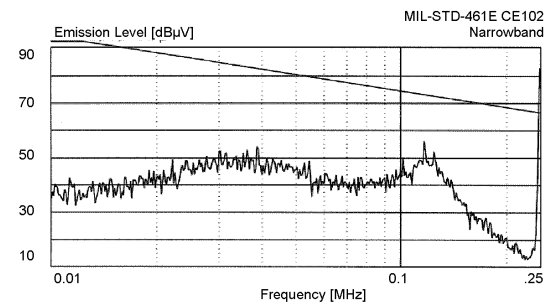


Figure 10 – VPT100+2800D without EMI Filter

Figure 11 – VPT100+2800D with VPTF Series EMI Filter

PACKAGE SPECIFICATIONS

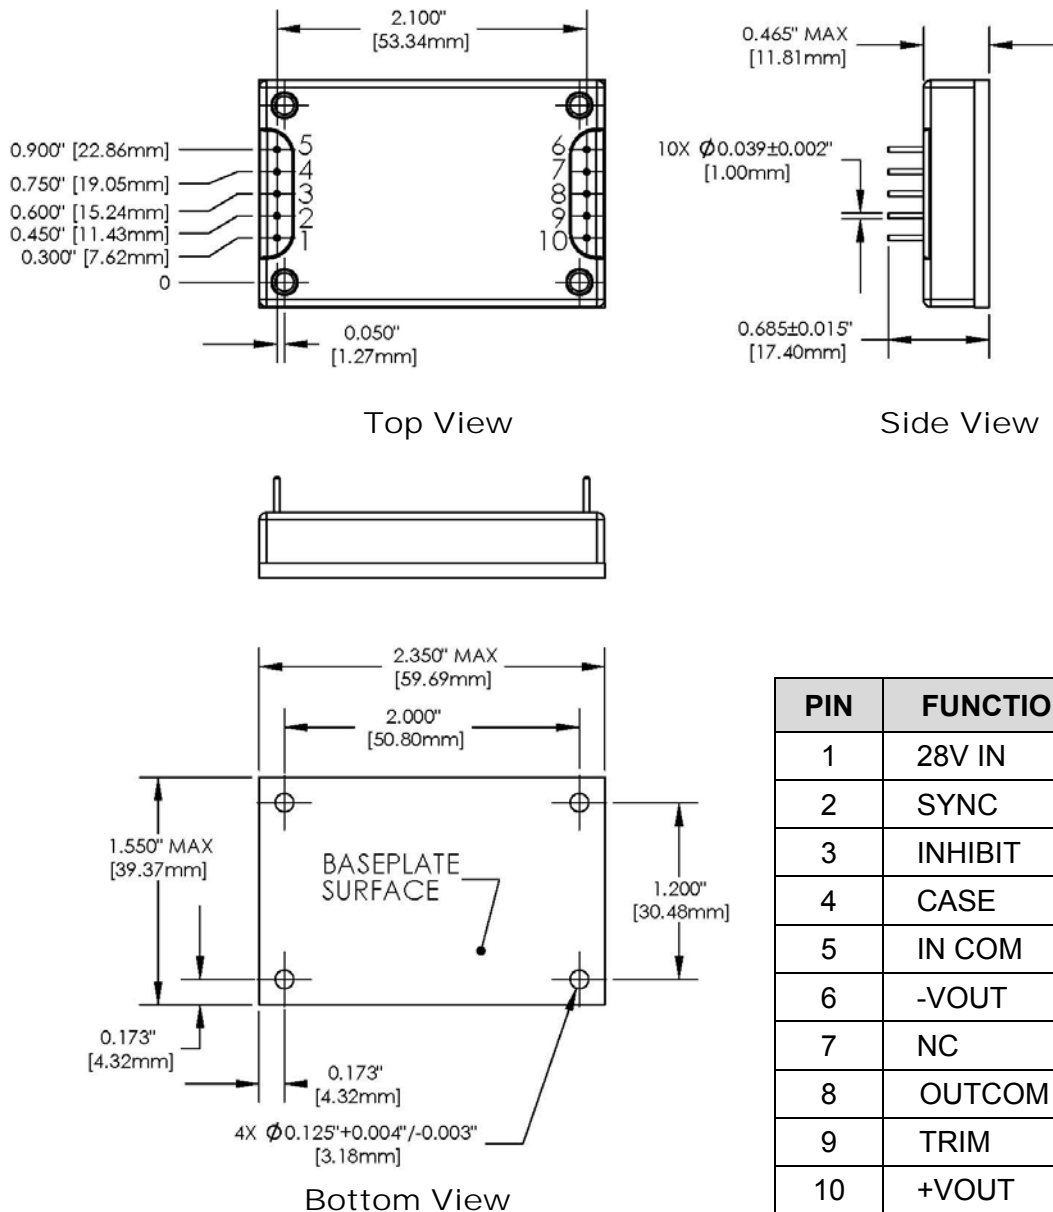


Figure 12 – Package and Pinout
(Dimensional Limits are ± 0.005 " Unless Otherwise Stated)

Package Notes:

- Case temperature is measured on the center of the baseplate surface.
- Materials: Baseplate – aluminum, conductive conversion coating.
Cover – nickel plated.
Pins – copper, gold over nickel plating.
- Mounting holes are not threaded. Recommended fastener is 4-40.
- This Package is not hermetic. VPT offers a wide range of hermetic products. Please contact VPT for details if hermetic products are required.
- For applications requiring exposure to liquid cleaning, please contact VPT.

PACKAGE PIN DESCRIPTION

| Pin | Function | Description |
|-----|----------|--|
| 1 | 28VIN | Positive Input Voltage Connection |
| 2 | SYNC | Input Synchronization Signal. TTL squarewave, 5Vpp, 20 - 80% duty cycle, internally capacitively coupled. |
| 3 | INHIBIT | This is an open collector input. Logic Low = Disabled Output. Connect the inhibit pin to input common to disable the output. Unconnected, open collector or open drain = Enabled Output. |
| 4 | CASE | Case Connection |
| 5 | INCOM | Input Return Connection |
| 6 | -VOUT | Negative Output Voltage Connection |
| 7 | NC | No Connection. |
| 8 | OUTCOM | Output Return Connection |
| 9 | TRIM | Trim Output Voltage to +10%, -20% of Nominal Value. Leave open if not used. |
| 10 | +VOUT | Positive Output Voltage Connection |

100% ENVIRONMENTAL SCREENING

| Screening | Condition |
|---------------------|---|
| Internal Visual | IPC-A-610 |
| Stabilization Bake | MIL-STD-883, Method 1008, Condition B, 125°C, 24 hours |
| Temperature Cycling | MIL-STD-883, Method 1010, Condition B, -55°C to +125°C, 10 Cycles |
| Burn-In | MIL-STD-883, Method 1015, 96 hours at +100°C |
| Final Electrical | 100% at 25°C |
| External Visual | MIL-STD-883, Method 2009 |



ORDERING INFORMATION

| | | | |
|---------|----|----|---|
| VPT100+ | 28 | 12 | D |
| 1 | 2 | 3 | 4 |

| (1) Product Series | (2) Nominal Input Voltage | | (3) Output Voltage | | (4) Number of Outputs | |
|-----------------------|------------------------------|----------|-----------------------|----------------------|--------------------------|------|
| VPT100+ | 28 | 28 Volts | 12 15 | 12 Volts 15 Volts | D | Dual |

CONTACT INFORMATION

To request a quotation or place orders please contact your sales representative or the VPT Inc. Sales Department at:

Phone: (425) 353-3010
Fax: (425) 353-4030
E-mail: vptsales@vpt-inc.com

All information contained in this datasheet is believed to be accurate, however, no responsibility is assumed for possible errors or omissions. The products or specifications contained herein are subject to change without notice.